


Canrig Titan™


Cut connection time and eliminate manual-tong use. The Canrig Titan™ automated wrench boosts rig-floor safety and delivers higher torque capacity across all tool-joint sizes, enabling better handling on larger or higher-torque connections.

Features & Benefits

- Balanced design
- Accurate torque
- Three jaws
- Compact die spacing
- Broader tool-joint range
- Dynamic clamping

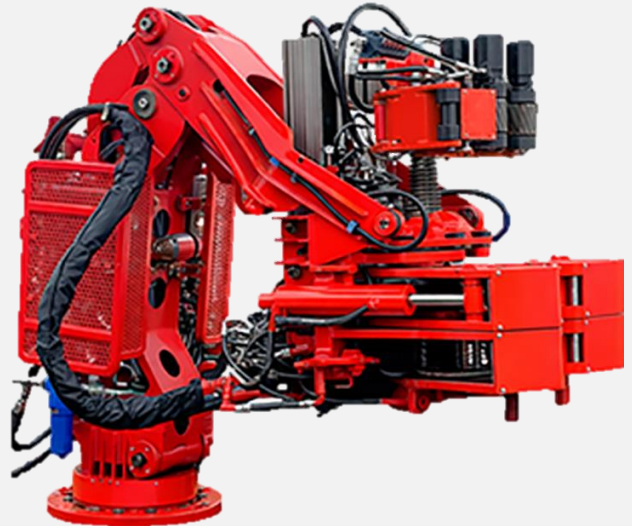

Slip Line Torque vs. Tool Joint Diameter

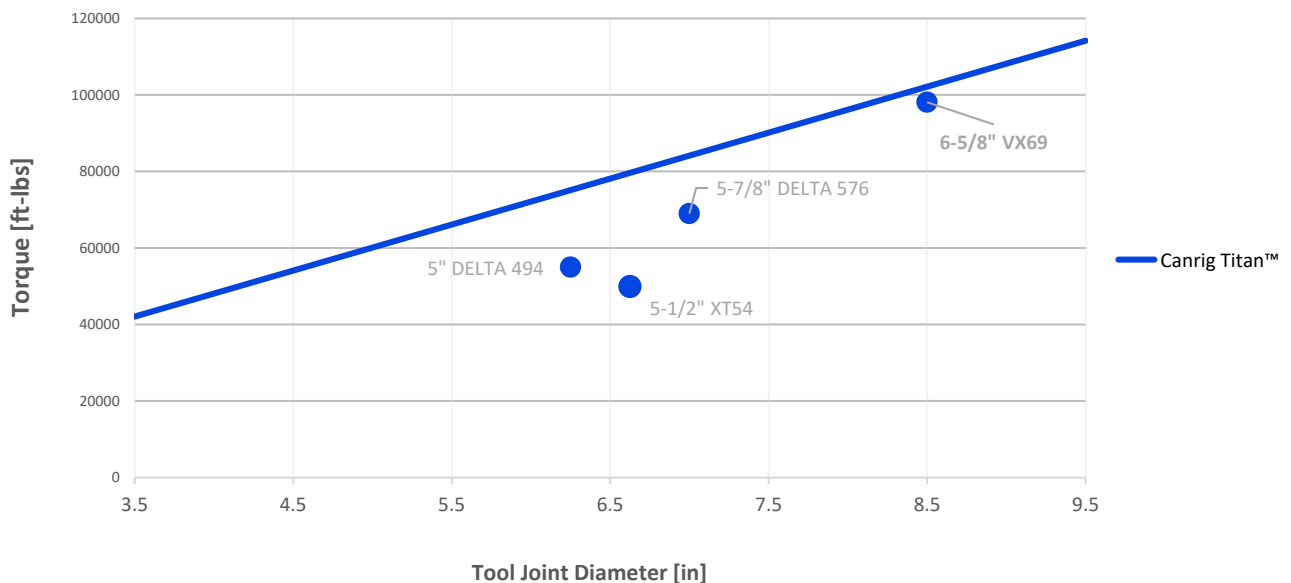

**Note: This chart assumes worn dies*

Canrig Titan™

Cut connection time and eliminate manual-tong use. The Canrig Titan™ automated wrench boosts rig-floor safety and delivers higher torque capacity across all tool-joint sizes, enabling better handling on larger or higher-torque connections.

- Proven over thousands of connections, one bite every time.
- Makeup and breakout cycle times reduced on average by 30%.
- Reduced die changes by more than 50%.
- Eliminated manual tong intervention for safer, hands-free operation.

	Canrig Titan™
Makeup Torque	110,000 ft-lb
Breakout Torque	110,000 ft-lb
Tool Joint Range	3.5"-9.5"
Number of Jaws	3
Dynamic Clamping	Yes
Balanced Torque	Yes
Wrench Rotation	45°
Guide Ring	No
Torque Error	~1%
Die Spacing	13.25"
Active Centralizer	Yes
Connection Speed*	18s

* Cycle time at well center, does not include extend/retract position time, drill pipe type dependent

