


MODEL SPECIFICATIONS: Canrig Titan™



Weight and Dimensional Data

Retracted Dimensions (LxWxH)	102 x 52 x 98 in. 2,591 x 1,321 x 2,489 mm
Extended Dimensions (LxWxH)	156 x 52 x 127 in. 3,962 x 1,321 x 3,226 mm
Shipping Dimensions (LxWxH)	102 x 72 ½ x 118 in. 2,591 x 1,842 x 2,997 mm
Weight (Installed)	10,500 lbs. 4,763 kg
Weight (Shipping)	11,500 lbs. 5,216 kg

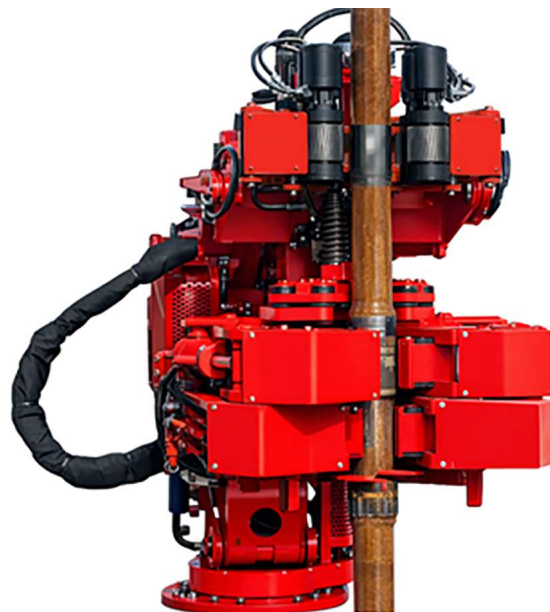

Technical Specifications

Tool Joint Diameter Range	3 ½ in. – 9 ½ in. 89 mm – 241 mm
Minimum Hydraulic Requirements	3,000 psi @ 45 GPM* *65 GPM Recommended
Makeup Torque (Max)	110,000 ft-lb 149,140 Nm
Breakout Torque (Max)	110,000 ft-lb 149,140 Nm
Spinner Torque with 5" DP @ 3,000 psi	3,000 ft-lb 4,067 Nm
Spinner Speed with 5" DP @ 55 GPM	106 RPM
Horizontal Operational Range	95 in. – 110 in. 2,413 mm – 2,794 mm
Vertical Operational Range at 95" extension	26 ½ in. – 56 ½ in. 673 mm – 1,435 mm
Vertical Operational Range at 110" extension	34 ¾ in. – 64 ¾ in. 883 mm – 1,645 mm
Rotation	359°